

## Features

- ASME coded and stamped vessels
- Standard pressure rating 150 psi (other pressure ratings available upon request)
- Standard models are designed and sized to cover a wide range of applications and loads
- Flash vessels are designed to provide low velocity flash steam with no water carryover
- Quick payback for flash recovery investment
- Special tanks available upon request

For a fully detailed certified drawing, refer to CDF #1023.

## Flash Steam Savings Analysis

### Part I: Determining the amount of flash steam produced

- A. Condensate Load                      A = \_\_\_\_\_ lb/hr.  
 B. Annual hours of operation            B = \_\_\_\_\_ hrs/yr.  
 C. Steam Cost                                C = \_\_\_\_\_ \$/1,000 lbs.  
 D. Flash steam percentage from chart   D = \_\_\_\_\_ %  
 (on page 264)  
 E. Flash steam produced:  
     D x A = flash steam produced        E = \_\_\_\_\_ lb/hr.

### Part II: Determining dollar value of the flash steam

F. Annual flash steam savings:

$$F = \frac{E \times B \times C}{1,000} \quad F = \text{_____ } \$/\text{yr.}$$

## Physical Data—Standard Design Model VAFT

| Model No. | AFT-6 |       | AFT-8 |       | AFT-12 |       | AFT-16 |       |
|-----------|-------|-------|-------|-------|--------|-------|--------|-------|
|           | in    | mm    | in    | mm    | in     | mm    | in     | mm    |
| A         | 36    | 914   | 36    | 914   | 40     | 1,016 | 48     | 1,219 |
| B         | 21    | 533   | 21    | 533   | 23     | 584   | 26     | 660   |
| C         | 9-1/2 | 241   | 9-1/2 | 241   | 9-1/2  | 241   | 9-1/2  | 241   |
| D         | 51    | 1,295 | 52    | 1,321 | 55-3/8 | 1,407 | 63-1/2 | 1,613 |
| E         | 36    | 914   | 36    | 914   | 40     | 1,016 | 48     | 1,219 |
| F         | 6     | 150   | 8     | 203   | 12     | 305   | 16     | 406   |
| G         | 2     | 50    | 3     | 80    | 4      | 102   | 6      | 150   |
| H         | 2-1/2 | 65    | 4     | 102   | 6      | 150   | 6      | 150   |
| I         | 1-1/2 | 40    | 1-1/2 | 40    | 2      | 50    | 2      | 50    |
| J         | 3/4   | 20    | 1     | 25    | 1-1/2  | 40    | 2      | 50    |
| K         | 1/2   | 15    | 1/2   | 15    | 1/2    | 15    | 1/2    | 15    |

NOTE: Connections "G" and "H" are 150 lb. flanges. All others are NPT. All flash tanks are ASME coded for 150 psig (10 bar). Special sizes available upon request.

## Capacities—Standard Design Model VAFT

| Model No. | Maximum Condensate Load |       | Maximum Flash Load |       |
|-----------|-------------------------|-------|--------------------|-------|
|           | lb/hr                   | kg/hr | lb/hr              | kg/hr |
| AFT-6     | 2,000                   | 907   | 500                | 227   |
| AFT-8     | 5,000                   | 2,268 | 1,000              | 454   |
| AFT-12    | 10,000                  | 4,536 | 2,000              | 907   |
| AFT-16    | 20,000                  | 9,072 | 3,000              | 1,361 |

\*last updated 11/15

## How much flash steam is available?

1. Follow horizontal axis right to primary discharge pressure.
2. Follow vertically up to secondary pressure curve.
3. Move left to "Percentage of flash steam."

### Example:


Condensate load = 10,000 lb/hr  
 Primary pressure = 100 psig  
 Secondary pressure = 10 psig

Percentage of flash = 10.6%  
 Secondary steam load = 1,060 lb/hr  
 (10,000 lb/hr x .1060 = 1,060 lb/hr)

### Selection:

Model AFT-12

## Percentage of Flash Steam Formed When Discharging Condensate to Reduced Pressure

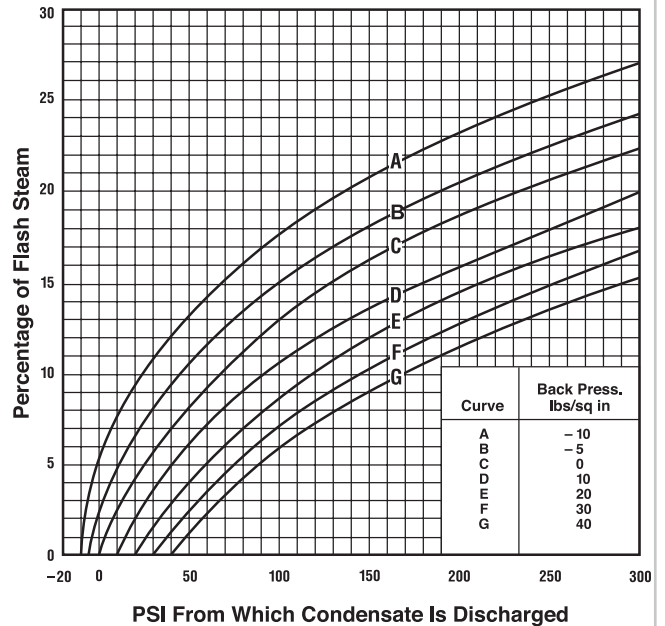

## Application Information


- Condensate Load to Flash Tank **6,000** lb/hr
- Pressure of Incoming Condensate **100** psig
- Flash Tank Pressure **20** psig
- Flash Percentage **9.5%**
- Flash Amount =  $A \times (D/100) = 570$  lb/hr
- Low Pressure Steam Required **2,500** lb/hr
- High Pressure Steam **200** psig
- Back Pressure **5** psig

Flash tank will accommodate (A) **6,000** lb/hr of condensate at (B) **100** psig, resulting in (E) **570** lb/hr of flash steam at (C) **20** psig. The flash tank shall be Armstrong Model AFT-12.

The back pressure regulator shall pass (E) **570** lb/hr of steam from (C) **20** psig to atmosphere. The back pressure regulator shall be Armstrong Model **1" GP-2000R**.

The pressure reducing valve shall pass (F) **2,500** lb/hr of steam from (G) **200** psig to (C) **20** psig. Pressure reducing valve shall be **3/4" GP-2000**.

The steam trap shall be an inverted bucket type with large vent and internal check valve. The steam trap will be sized using a 3:1 safety factor. The steam trap shall pass  $3 \times (A - E)$  **16,290** lb/hr at a (C - H) **15** psi differential. The steam trap shall be an Armstrong Model **2" 816 CV**.

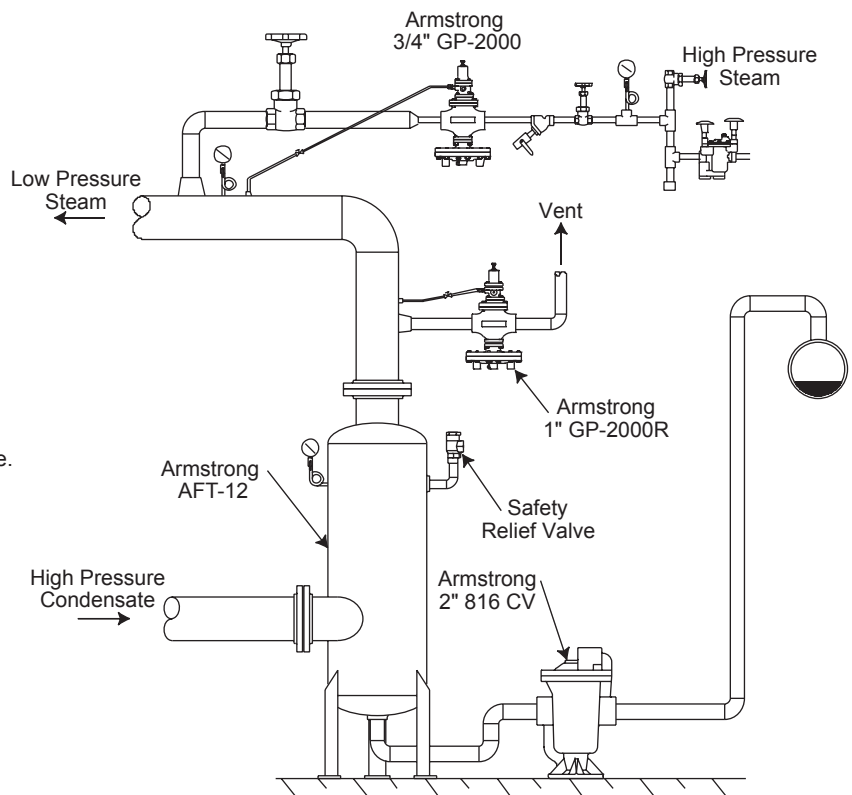

\*last updated 11/15